


Key Features

- Built-in USB-C for simultaneous 65W fast charge and visual display
- Wireless presentation across devices and rooms
- 24/7 Multimedia playback
- Centralised IT management and content display via myViewBoard Manager
- Crestron®, Extron, AMX ProAV control systems compatibility

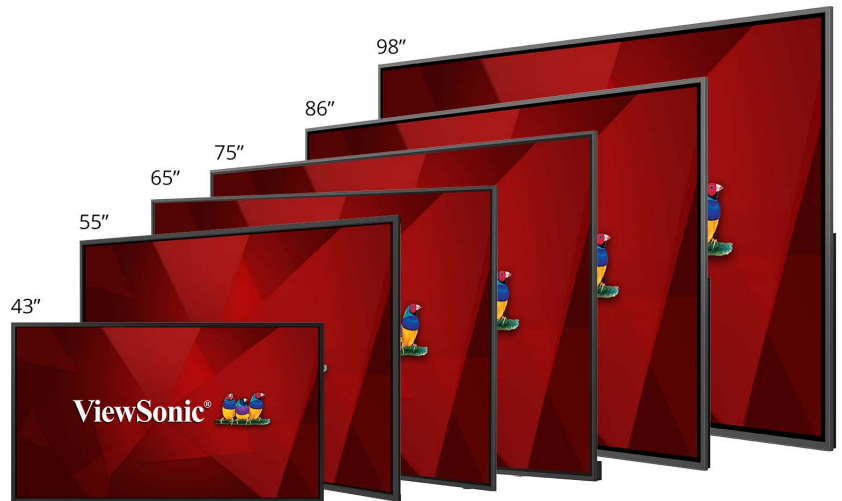

Product Description

The ViewSonic® CDE30 series is a 4K UHD presentation display, ranging from 43" to 98". The built-in screen sharing software*, ViewBoard® Cast and myViewBoard Display enable multiple users, whether onsite or online, to participate in conferences and share content simultaneously, transforming the CDE30 series into a dynamic content hub. This reliable presentation display is equipped with a Quad-core embedded SoC processor, 4GB RAM, and 32GB internal memory, allowing constant multimedia play from internal storage or a USB flash drive 24 hours a day, seven days a week. Supporting remote configuration and content management systems, the ViewSonic® CDE30 series is also suitable for diverse signage applications.

*Chrome, Android, Windows, Mac OS, and iOS compliant

*Chromecast and AirPlay support

Visit Us

www.viewsonic.com

Model		CDE4330	CDE5530	CDE6530	CDE7530	CDE8630	CDE9830	
Display	Panel Size	43"	55"	65"	75"	86"	98"	
	Native Resolution	UHD 3840x2160(Pixels)						
	Brightness	500 nits						
	Contrast Ratio	5000:1 (DCR)						
	Response Time	6.5ms			8ms			
	Viewing Angles	H = 178, V = 178 typ.						
	Backlight Life	50,000 Hours (Min)						
	Surface Treatment	Hardness: 3H, Anti-glare coating						
	Bezel	Slim						
	Application	24/7						
	Orientation	Landscape & Portrait						
Embedded OS		Android 11						
Platform	Processor	Quad-Core ARM Cortex-A55						
	RAM	4GB DDR4						
	Storage	32GB						
Input	HDMI	x2 (HDMI1 Support ARC)		x3 (HDMI1 Support ARC, HDMI 3 don't support daisy chain)				
	RS232	x1						
	WiFi Slot	x1						
	OPS Slot	N/A			x1 PC Slot			
HDMI-OUT		x1						
SPDIF		x1						
LAN	RJ45	x1						
USB	Type A	USB2.0 x 1, USB3.0 x 1						
	Type C	x1, (DP1.2, PD 65W, USB2.0, 100M Ethernet)						
USB Supported File Format		Picture - BMP, GIF, JPEG, PNG Video - MPEG 1/2, MPEG-4, H.263, H.264, MJPEG, VP8, VP9, H.265 Audio - AAC, Monkey's Audio, FLAC, PCM, ALAC, MPEG Audio Layer 3, Vorbis, WAV						
Speakers		16W x 2						
Bundle Software	Wireless Casting	Viewboard Cast, myViewBoard Display, AirPlay, Chromecast						
	Remote Device Management	myViewBoard Manager						



Model		CDE4330	CDE5530	CDE6530	CDE7530	CDE8630	CDE9830
Power	Voltage	100-240VAC +/- 10% Wide Range					
	Consumption	64W	82W	88W	126W	172W	190W
Ergonomics	Wall Mount (VESA®) (mm)	200 x 200	400 x 200	600 x 400	800 x 600	800 x 600	800 x 600
Operating Conditions	Temperature (° C)	0°C to 40°C					
	Humidity	10% ~ 90% RH non-condensing					
Dimensions (W X H X D)	Physical (inch)	37.98 x 21.75 x 2.81	48.54 x 27.70 x 2.81	57.61 x 33.0 x 3.21	66.36 x 37.94 x 3.21	76.02 x 43.38 x 3.21	87.12 x 49.94 x 3.11
	Physical (mm)	964.6 x 552.5 x 71.4	1233 x 703.5 x 71.5	1463.3 x 838.3 x 81.6	1685.6 x 963.7 x 81.6	1930.8 x 1101.8 x 81.6	2212.9 x 1268.4 x 79
	Packaging (inch)	41.57 x 26.46 x 6.14	52.44 x 32.24 x 6.14	63.78 x 37.09 x 8.19	73.35 x 42.91 x 8.86	83.07 x 48.3 x 8.86	92.91 x 56.1 x 11.02
	Packaging (mm)	1056 x 672 x 156	1332 x 819 x 156	1620 x 942 x 208	1863 x 1090 x 225	2110 x 1227 x 225	2360 x 1425 x 280
Weight	Net (lb/kg)	21.83lb / 9.9kg	29.54lb / 13.4kg	56.0lb / 25.4kg	76.39lb / 34.65kg	95.13lb / 43.15kg	153.0lb / 69.40kg
	Gross (lb/kg)	30.53lb / 13.85kg	42.99lb / 19.5kg	73.3lb / 33.25kg	106.15lb / 48.15kg	133.93lb / 60.75kg	199.1 b / 90.30kg
Regulations		cTUVus, FCC/ICES003, Energy star 8, EPEAT, Mexico NOM or CoC, Mexico Energy, EMC/CE Report, CB, EAC, UkrSEPRO, RCM, LBL, flicker free, Green BOM, RoHS DoC, ErP, REACH DoC, SCIP, WEEE report, Annex I, Annex II, TPCH DoC, Packing waste, CA65 DoC					
Package Contents		<ol style="list-style-type: none"> 1. Power cable (3 metres) 2. Remote Control with batteries 3. Quick Start Guide 4. HDMI cable (3 metres) 5. USB-C cable (1.8 metres) 6. Wall Mount Screw (M8 x 4) 7. RS232 adaptor 8. Compliance statement 					

