


Key **Features**

- myViewBoard™ suite with whiteboard, wireless casting and remote device management
- Front-facing dual speakers for better engagement
- Pen-on-paper writing experience with
 Ultra Fine Touch Technology
- Quad Core CPU powered by Android 9.0
 OS
- · Low blue light certified



Product **Description**

The ViewBoard® 32 series provides a comprehensive solution for schools and teachers looking to deliver more interactive and engaging lessons. The 4K UHD display features bonding technology for clearer colors and less glare. A 20-point touchscreen interface allows users to collaborate naturally either with a finger or one of the ViewBoard styluses. The built-in access to the myViewBoard suite brings together all of the hardware with a seamless software integration. The display also features Ultra Fine Touch Technology that delivers a paper-like writing experience with instant response and high accuracy, while dual-tip pen support allows you to simultaneously write or draw with two different colors. Users will also enjoy additional connectivity via the SmartPort™ USB and multi I/O ports, including HDMI/VGA, when looking to connect other devices for further classroom support. The included myViewBoard digital whiteboarding software combines enterprise-level security with cloud-based portability and annotation tools including simple, wireless casting capability with secure single sign-on, innovative collaboration tools, easy conversion of common files, and much more. Additionally, myViewBoard Manager offers a single-point management system capable of simultaneously controlling multiple displays.

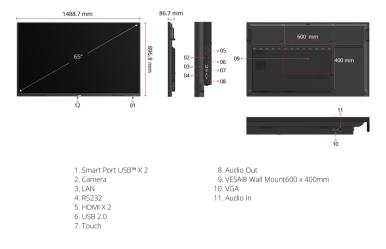

Visit Us

www.viewsonic.com

Resolution: UHD 3840x2160(Pixels) Colors: 1.07B colors (10bit) Brightness: 350 nits (typ.) Contrast Ratio: 4000:1 Response Time: 6.5ms Viewing Angles: H = 178, V = 178 typ. Backlight Life: 30,000 Hours (Min) Surface Treatment: Hardness: 9H Anti-glare coating POWER Processor: ARM quad-core Cortex-A55 RAM: 2GB DDR4 Storage: 16GB TOUCH Type/ Tech: Ultra Fine Touch Technology INPUT HDMI: 2.0 x2 (3840x2160 @60Hz) (HDMI2) ports support ARC function) RGB / VGA: x1 Audio: x1 (PC audio in) RFS (20 TECH TEATURES SPECIAL FEATURES All-in-one USB port: USB port: Specific to all channels to all channel	DISPLAY		EMBEDDED OS	
Display Area (mm):	Panel Size:	65"	Android 9	
Display Area (mm):	Panel Type:		BUNDLE SOFTWARE	
Display Area (min): diagonal) Aspect Ratio: 16:9 Pro Annotation Software: Windows (min) Wireleas of the Professional Pro	<i>,</i> ,		Basic Annotation Software:	myViewBoard Whiteboard
Aspect Ratio: 16-9 Resolution: UHD 3840x2160(Pixels) Colors: 1.078 colors (10bit) SPECIAL FEATURES SPECIAL FEATURES SPECIAL FEATURES SPECIAL FEATURES SPECIAL FEATURES SImple LAN sharing between IFP and silot-in PC/Android/HDMI USB port) Front "SmartPort™ USB" to all change of the vice: 1 to all c	Display Area (mm):		Pro Annotation Software:	Windows (Embedded in optional Windows Slot-
Mireless Presentation: myViewBoard Display	Aspect Ratio:	16:9		
Colors: 1.078 colors (10bit) SPECIAL FEATURES Signification: 350 nits (typ.) All-in-one USB port: USB port; USB port) Front "SmartPort." USB" SmartPort. USB" USB port; USB port) Front "SmartPort." USB" SmartPort. USB" USB port; USB port) Front "SmartPort. USB" USB port; USB port; USB port) Front "SmartPort. USB" USB port; USB po	Resolution:	UHD 3840x2160(Pixels)	Wireless Presentation:	myViewBoard Display
Brightness 350 nits (typ.) Contrast Ratio: 4000:1	Colors:	1.07B colors (10bit)	SPECIAL FEATURES	, , ,
Response Time: 6.5ms	Brightness:	350 nits (typ.)	(combine slot-in PC/Andi All-in-one USB port: USB port) Front "SmartP	
Response Time: 6.5ms Simple LAN sharing between IFP and slot-in device: 10/100M for Android & Slot-in PC	Contrast Ratio:	4000:1		
Viewing Angles: H = 178, V = 178 typ. and slot-in device: 10/10/M for Android & Sist-In PC Backlight Life: 30,000 Hours (Min) Light Sensor: Yes Surface Treatment: Hardness: 9H Anti-glare coating POWER Corientation: Landscape Voltage: 162-240VAC +/- 10% PLATFORM Consumption: On: 175W (typ.) / Off; <0.5W PLATFORM Consumption: On: 175W (typ.) / Off; <0.5W PLATFORM Consumption: On: 175W (typ.) / Off; <0.5W PROMORICS PROMORICS Wall Mount (VESA®): 600x400 OPERATING CONDITIONS Temperature (° C): 0°C to 40°C Humidity: 10% ~ 90% RH non-condensing DIMENSIONS (W X H X D) Physical (inch / mm): 1489×897×87 mm / 58.8x35.3x3.4 in INPUT Packaging (inch / mm): 1628×208×1005 mm / 64x8.2x39.5 in WEIGHT WEIGHT WEIGHT WEIGHT WEIGHT WEIGHT				

Copyright © ViewSonic Corporation 2000-2022. All rights reserved.